


**2U Rackmount Chassis  
with 4 Drive Bays, 3 PCI  
32-bit Riser Card and 2U 300W  
ATX PSU for ATX Motherboard**

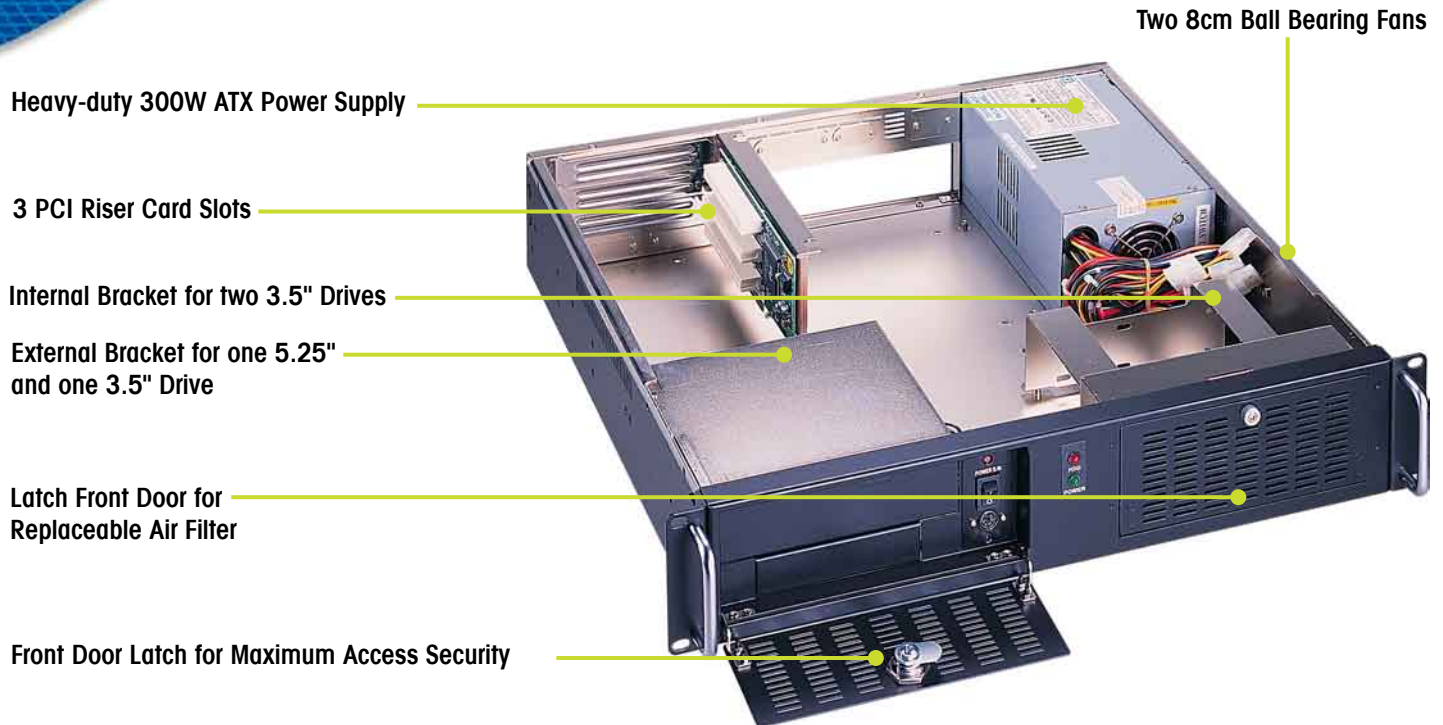

## Introduction

The RCK-204M is a 2U Rackmount chassis that boasts a depth of only 450mm (17"), thus providing an ideal solution for those applications where the chassis depth can make or break a project. Equipped to handle ATX motherboards or Dual CPU server boards, the RCK-204M proves to be a perfect choice for all ISP or Telecom applications. Exceeding the drive capacity of most 2U chassis, the RCK-204M can support up to four drive bays, one 5.25" CD/DVD, (1) 3.5" FDD, and (2) "hidden" internal 3.5" bays. A PCI riser card can be used with up to (3) PCI slots for additional peripherals. Two 8cm ball bearing fans ensure excellent airflow when faced with a heat sensitive application. The RCK-204M provides a robust solution to any server application, while still remaining compact.

## Features


- EIA RS-310C 19" Rackmount Standard.
- Heavy Duty Steel with Ni Plating.
- Supports ATX Motherboard or Dual CPU Server Board.
- Slide Rail Applicable.
- Lockable Front Door and Replaceable Air Filter.
- Front Access to PS/2 Keyboard Connector
- 2 x 8cm Replaceable High-speed Ball Bearing Fans for Better Ventilation.
- 300W/400W ATX Auto-switch Power Supply.

## Contact Information

12F-3 No 77 Shin Tai Wu Road Sec 1  
221 Hsi Chi, Taipei Hsien, Taiwan, ROC  
Telephone: +886-2-2698-3280 / Fax: +886-2-2698-3304  
Sales: sales@aicsys.com / Technical Support: support@aicsys.com



## Technical Drawings

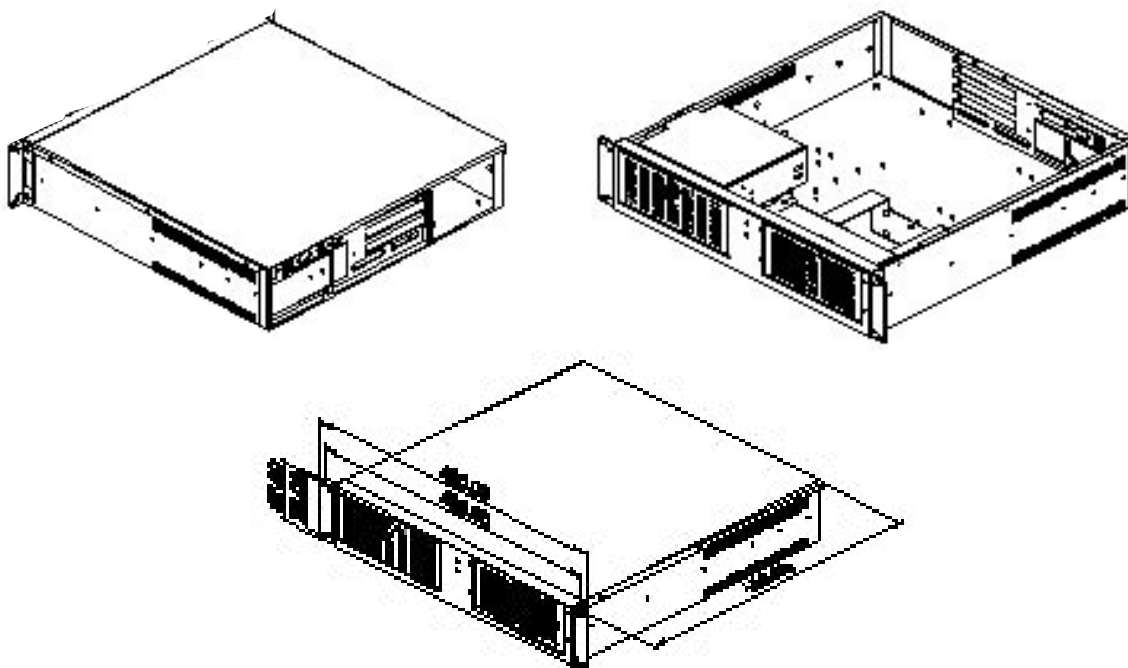

### Construction

Heavy duty steel with Ni plating

### Color

Black

### Board Support

ATX Motherboard or Dual CPU Server Card.

### Drive Bays

One 5.25" + one 3.5" external drives and two 3.5" internal drives.

### Expansion

3 PCI Riser Card 32 bit.

### Power Supply

2U 300W ATX power supply.

### Cooling

Two 8 cm ball bearing fans and replaceable air filter.

### Keyboard/Mouse Ports

One front panel PS/2 connector for keyboard/mouse.

### Switches

On/Off switch, touch free reset switch.

### Indicators

One power on/off LED and one HDD LED.

### Dimensions

424mm (W) x 450mm (D) x 88mm (H) / 16.6" x 17.7" x 3.5"

### Operating Temperatures

0~55 °C

### Gross Weight

12.5 kg

### Ordering Information

RCK-204M-300W

2U chassis RCK-2704MX with 3 PCI riser card 32 bit and 300W ATX 2U power supply (PFC optional)

### Contact Information

12F-3 No 77 Shin Tai Wu Road Sec 1  
221 Hsi Chi, Taipei Hsien, Taiwan, ROC  
Telephone: +886-2-2698-3280 / Fax: +886-2-2698-3304  
Sales: sales@aicsys.com / Technical Support: support@aicsys.com